


HOW TO MEASURE YOUR WINDOW - BLINDS

When measuring your window it is better to use a metal ruler / tape measure as fabric tape measures can stretch giving inaccurate results.

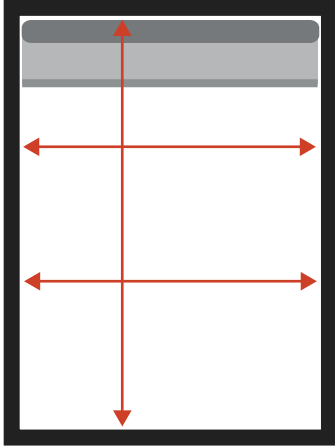


Recess / Inside Mount (Recommended)

Ensure the recess is at least 75mm / 3 inches deep in order to fit the brackets for the roller blind.

Window is to be measured internally, both horizontally and vertically where indicated.

Double horizontal measurement must be taken to ensure window is square. Ensure any sills and window depths will not affect blind installation or operation.

Note: Roller Blind brackets add additional width to blinds. See individual packaging for sizing details.

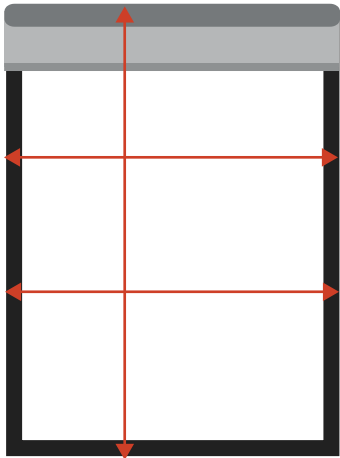

Face / Outside Mount

Window is to be measured externally, both horizontally and vertically where indicated.

Architraves should be included to ensure total window coverage to prevent light filtering through sides of blind.

Ensure any sills and window depths will not affect blind installation or operation.

Installation: please refer to instructions enclosed in the packaging.



WARNING

Young children can strangle in the loop of pull cords, chain and bead cords, and cords that run through window coverings. They can also wrap cords around their necks.

To avoid strangulation and entanglement keep cords out of reach of young children. Also

1. Install safety devices that remove the cord loop or reduce the access to cords, and
2. Move cots and furniture away from window covering cords.