




# WILSON AWNINGS RANGE

Made in Australia for tough Australian Conditions

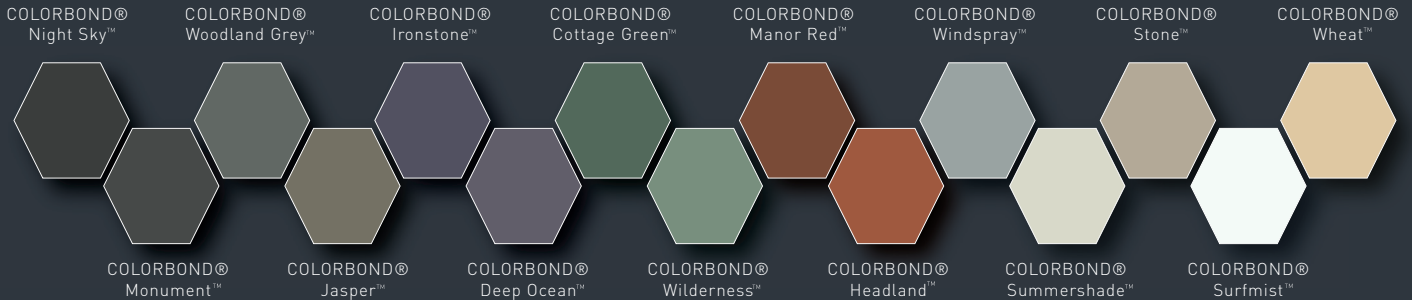

Wilson's "New Traditions" Awning Fabric Matched to **Colorbond®**

- ✓ Wide Width - 280cm
- ✓ Australian Made
- ✓ Stock Supported
- ✓ Quality Poly-Cotton Fabrics
- ✓ Matched to COLORBOND® Colours
- ✓ Rolls and Cut Length Available

Wilson's "New Traditions" Awning Fabric can be used for:



Projection Awning



Dutch Canopy



Fixed Frame External Blinds

Wilson Awnings: quality Australian Made fabrics, proudly environmentally friendly, durable with water, mildew & stain resistant qualities.

- ✓ 5 Year Fabric Warranty
- ✓ Australian Made
- ✓ PVC & Lead Free
- ✓ ISO 9001 Certified
- ✓ Mold, Mildew & Rot Resistant
- ✓ Water Resistant
- ✓ UV Resistant
- ✓ Stain Resistant

At Wilson Fabrics, we've got you covered!



FOLLOW US



MADE IN AUSTRALIA

Toll free phone: 1300 656 100

[WWW.WILSONFABRICS.COM.AU](http://WWW.WILSONFABRICS.COM.AU)

COLORBOND® is a registered trademark of BlueScope Steel



# WILSON AWNINGS RANGE

Made in Australia for tough Australian Conditions

INFORMATION	
Weight	504gsm /16.90oz (12oz loomstate)
Width	280cm / 110 Inches
Construction	50/50 poly/cotton plain weave
Roll Length	20-25mts / 21-27 yards
Tear Strength	Warp: 97.8 N / Weft: 60.4 N
Breaking Force	Warp: 2735.5 N / Weft: 1121.0 N
Ultraviolet Protection Factor (UPF)	50+
Water Resistance (Hydrostatic Head)	8.6 Kpa

### Do

Keep your awnings clean.

To remove dirt, brush dry fabric with a soft bristle brush and vacuum or blow off.

Occasional hosing may remove dust and some ingrained dirt.

Remove any mildew, as it appears on the fabric (fabric is mildew and rot resistant, but mildew can grow on accumulated dirt), first by brushing then by treating with diluted chlorine bleach (typically 1 part White King to 4 parts of water ) Allow to dry in full sun then hose well to remove residue.

Keep vines and shrubs away from the fabric as they may contain acids that are harmful to the fabric.

Use your awning fully extended. Periodically adjust awnings to their fullest extension if they have been used partly retracted for any length of time.

Always roll up or retract your awnings in high winds and storms - the leverage exerted can strain fittings and mountings.

Avoid rolling up awnings when wet.

### Don't

Drag your fabric across any abrasive surface.

Mow lawns or clean gutters etc near awnings when they are extended.

Allow water to stand on the fabric as this will cause pocketing and possible stretching.

Allow leaves, dirt etc to remain on your awnings as they might stain the fabric.

Use insect spray near or on the fabric as this may cause staining or affect the water repellence of the fabric.

Scrub the fabric or wash with a harsh solution.

Force your awnings when raising or lowering.

Fold or roll the fabric in cold temperatures or when damp or wet as this may cause mould or mildew to grow and result in staining.

Have fires or a bbq beneath or around the awning.

For details on our warranty please visit our website **"Care & FAQ"**

FOLLOW US



MADE IN AUSTRALIA

COLORBOND<sup>®</sup> is a registered trademark of BlueScope Steel

Toll free phone: 1300 656 100  
[WWW.WILSONFABRICS.COM.AU](http://WWW.WILSONFABRICS.COM.AU)